

Maintenance free

Quiet,
dependable
operation

Vandal resistant

Exceptional
value & reliability

Up to 5 year
limited warranty



GX Series White



GX-BG Series Black Graphite




GX-C Series Chrome



GX-MR
Recessed Mount

A **RECESS KIT** is available to reduce the depth of the dryer to less than 4" from the surface of the wall on all models.



OVERVIEW:

THE GX SERIES AUTOMATIC HAND DRYERS PROVIDE A QUIET AND COMPACT DESIGN TO FIT ANY BUDGET.

construction features:

HEAVY DUTY ONE-PIECE COVER OPTIONS

- Flame retardant white ABS
- Steel with white epoxy finish (M)
- Steel with black graphite epoxy finish (BG)
- Steel with satin chrome finish (C)

TAMPER RESISTANT – Tamper resistant screws secure cover to base. Air intake vents are shielded for additional safety.

MOTOR – Permanently lubricated, maintenance-free, brushless induction motor with automatic resetting thermal protector. 1/12 HP, 3100 RPM.

AUTOMATIC SENSOR – RoHS compliant lead-free design. Microprocessor controlled infrared sensor turns dryer on when hands are under the outlet for up to 80 seconds.

HEATING ELEMENT – Constructed of NiChrome resistance wire with automatic resetting thermostat. Heating element operates in the black range for maximum life.

| P/N | Accessories |
|--------|-------------------------------------------------------------|
| ADA-W | White recess kit for all white models |
| ADA-SS | Stainless steel recess kit for (BG), (C), (SS) models |
| AP | Universal adapter plate for all surface models. Stainless. |
| SG | Stainless steel splash guard for all models. 14" H x 16" W. |

specifications GX

| | |
|----------------------------------------------------------|-------------------------------------------------------------|
| AIR FLOW | 130 CFM (Cubic Feet per Min.) |
| AIR VELOCITY | 4500 LFM (Linear Feet per Min.) |
| AIR TEMP | 130°F at 72°F Ambient |
| SOUND LEVEL | 63 dB (Quietest in its class) |
| DIMENSIONS SURFACE | 10-1/8" W x 9-3/8" H x 5-5/8" D |
| MOUNTING HEIGHTS (From floor to bottom of hand dryer) | Men 44" Women 42" Children 32"-42" Handicapped 36" |

WARRANTY:

5-year limited warranty GX-M/C. 3-year limited warranty GX. Includes **same day** factory repair or part replacement. See owner's manual for details.

GX model reference chart

| MODEL | | | | ELECTRICAL RATINGS | | | |
|-----------|-------------|----------------|--------------|--------------------|------|-------|-------|
| ABS White | Steel White | Black Graphite | Steel Chrome | Volts | Amps | Watts | Hertz |
| GX1 | GX1-M | GX1-BG | GX1-C | 110-120 | 12 | 1500 | 50/60 |
| GX3 | GX3-M | GX3-BG | GX3-C | 208-240 | 6 | 1500 | 50/60 |

Recessed Mounting is available by designating **(R)** after model no. or order kit separately. See accessories chart

GX SERIES MOUNTING DIAGRAMS

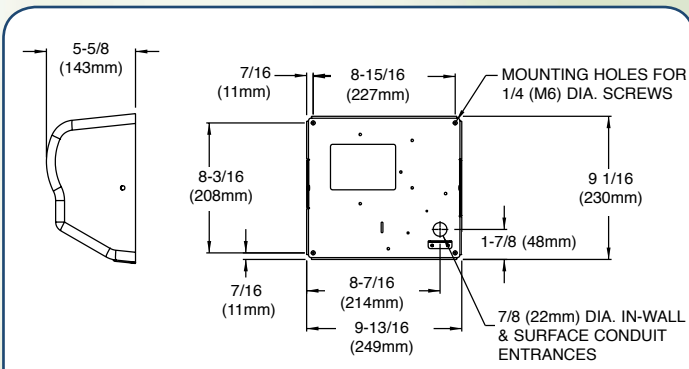


Figure 1 - GX Series Surface Mount

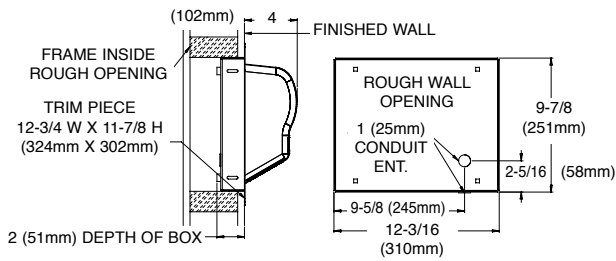


Figure 2 - GX-MR Series Recessed Mount

SAVE 95% VERSUS PAPER TOWELS

GX Series Hand dryers achieve up to a 95% cost savings over paper towels. These savings are realized by eliminating the maintenance and operating expenses associated with paper or linen towels.

"Our school saved over \$21,000 last year with American Dryer!"

COST ANALYSIS FOR A PUBLIC SCHOOL

| | |
|----------------------------|-----------------|
| Paper Towel Usage | 800 CASES |
| Total Paper Costs | \$24,000 |
| Hand Dryer Operating Costs | \$2,453 |
| ANNUAL SAVINGS | \$21,547 |
| Payback Time | 11 MONTHS |

COST ANALYSIS FOR A RESTAURANT

| | |
|----------------------------|----------------|
| Paper Towel Usage | 90 CASES |
| Total Paper Costs | \$2,025 |
| Hand Dryer Operating Costs | \$96 |
| ANNUAL SAVINGS | \$1,929 |
| Payback Time | 12 MONTHS |

Represented by:

GENERAL INFORMATION

DRYER PLACEMENT :

Dryers should be placed at least 2 feet apart and at least 12" from washbasin. Do not install dryer over washbasin. Automatic dryers should be at least 18" above any projection which may interfere with the operation of the automatic sensor.

DRYER INSTALLATION:

Hand dryers require a dedicated circuit (max. 20 amp) and must be properly grounded. One side of dryer should be mounted to a stud. All surface mount dryers are provided with conduit entrances for both between wall and surface wiring.

QUANTITY ESTIMATE, HAND DRYER:

Average traffic washroom.....1 dryer per 2 washbasins
 Heavy traffic washroom.....1 dryer per washbasin
 54" wash fountain.....4 dryers per sink

SHIPPING WEIGHT: GX 8 lbs, GX-M/BG/C 10 lbs

Printed on Recycled Paper



American Dryer, Inc.

33067 Industrial Road | Livonia, MI 48150 | U.S.A.
 Toll Free 800.485.7003 U.S. | Ph: 734.421.2400 | Fax 734.421.5580

Web: www.americandryer.com

Email: sales@americandryer.com

© American Dryer, Inc. All Rights Reserved
 Revised November 2011

